HYDRAULIC PRESSURE GAUGES

Gauge Type	Model Number	Face Diameter (in)	Thread (in)	Pressure Range (psi)	Pressure Range (bar)	Graduation: Major Graduation (psi)	Graduation: Minor Graduation (psi)	Graduation: Major Graduation (bar)	Graduation: Minor Graduation (bar)
Dry	GD2514	2.50	¼"-18NPTF	0-10,000	0-700	1,000	200	100	10
	GD4014	4.00				2,000	100		
Wet	GW2514	2.50				1,000	200		
	GW4014	4.00				2,000	100		

GAUGE ADAPTER

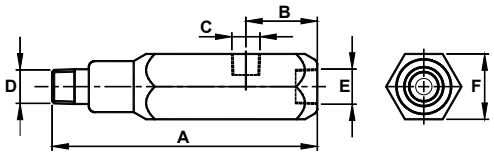

Model Number	Dimensions (in) A	B	C	D	E	F
CF3814	5.12	1.38	¼"-18NPTF	⅜"-18NPTF	⅜"-18NPTF	1.25

BASES

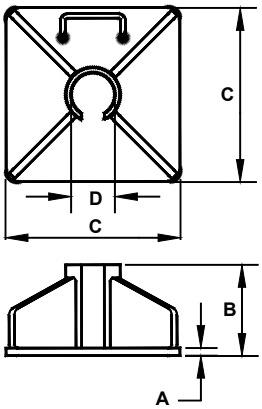

For use with Cylinder Capacity (tons)	Model Number	Dimensions (in) A	B	C	D
5	CB05	0.32	4.65	7.87	1.54
10	CB10	0.39	4.72	9.06	2.28
15	CB15	0.47	4.80	10.00	2.76
25	CB25	0.63	4.96	11.02	3.41

HYDRAULIC OIL

- Recommended for all BVA cylinders and pumps

Volume (gal)	Model Number	Viscosity Index (min)	Viscosity @ 100°F (S.U.S.)	Viscosity @ 210°F (S.U.S.)	ASTM Grade	Flash Point (°F)	Pour Point (°F)	API Gravity
1	F01	144	234	53	215	356	-49	30.8

PRESSURE SWITCH

CVS1

- Automatically shuts off electric pump when predetermined system pressure is reached

Model Number	Adjustable Pressure Range	Electrical Rating	Port Size	Weight (lbs)
CVS1	1,000~10,150 psi	15 amp @ 250V max	¼"-18NPTF	1.32

PUMP MOUNTED MANIFOLD BLOCK

- Converts BVA pumps with pump mounted valves for use with remote mounted valves
- Comes with 4 pieces mounting screws

PW34M